

## JetNet 4006f

### Industrial 6-port Managed Fast Ethernet Fiber Ring Switch



CE FC RoHS



- 4 10/100 Base TX ports plus 2 redundant 10/100 Base FX uplink ports
- Supports Multi-mode 2KM, Single-mode 30KM
- Patented Multiple Super Ring - Network Recovery time < 5 ms
- Patented Rapid Dual Homing – compatible with RSTP
- Supports LLDP and Korenix NMS software for auto-topology visualization and efficient group management
- Supports SNMP, Web, Telnet and Korenix NMS for remote management
- Port-Based VLAN with Tag Modification for efficient traffic transmission
- DHCP Client/Server/ DHCP Relay (Option 82) for automatic IP configuration
- IEEE 802.1p QoS with CoS, DSCP scheme for high-priority data traffic
- IGMP Snooping with Query Mode for optimized multicast forwarding
- DC 12~48V Redundant power input with polarity reverse protection
- Operating temperature -10~60°C for JetNet 4006f (JetNet 4006f-w: -40~60°C available by request)

Industrial Intelligent NMS

---

Rackmount PoE Plus Switch

---

Industrial PoE Plus Switch

---

Industrial 12-24V PoE Switch

---

Industrial PoE Switch

---

Rackmount L3/L2 Switch

---

Gigabit Managed Ethernet Switch

---

**Managed Ethernet Switch**

---

Entry-level Switch

---

Wireless Outdoor AP

---

Embedded PoE/Router Computer (LINUX)

---

Industrial Communication Computer (WIN/LINUX)

---

Ethernet/PoE/ Serial Board

---

Ethernet I/O Server

---

Media Converter

---

Serial Device Server

---

SFP Module

---

Din Rail Power Supply

---

## Overview

Korenix JetNet 4006f is an Industrial Managed fast Ethernet Ring switch equipped with 4 10/100 Mbps ports plus 2 100 Mbps fiber uplink ports for forming redundant connection in industrial Ethernet applications. The LLDP design allows the switches to be managed and configured easily by a single administrator console, where the topology can be automatically drawn in just seconds. The JetNet 4006f series combines more advanced Layer 2 management protocols, such as the DHCP option 82, VLAN, IGMP snooping or SNMPv3 for efficiently controlling and managing the network performance in industrial environments. To provide network redundancy with guaranteed

secure and reliable data transmission, JetNet 4006f supports Korenix patented fast network ring recovery technology - the Multiple Super Ring (R.S.R.), which can recover network failures in just 5 milliseconds.



The RSR co-exists with the IEEE 802.1d RSTP:2004 standard to deliver non-stop transmission by Rapid Dual Homing (R.D.H.) technology.

JetNet 4006f is designed with a slim IP31 rugged aluminum alloy injection case with great heat radiation ability to work reliably under high temperature environment. To provide more reliability for industrial applications, it supports wide range power input DC 12~48V with auto polarity reverse function.

## Auto Network Visualization & Topology Discovery

With the increasing popularity of internet applications, network traffic becomes heavier and hard to monitor and diagnose. To solve these issues, IEEE organization announced a new standard, the IEEE 802.1AB Link Layer Discovery Protocol for device auto discovery as well as for building infrastructure map by NMS. JetNet 4006f incorporates the LLDP



function and efficiently works with the Korenix patented Korenix NMS, to easily discover devices and automatically draw out network topology with the link interface number of each device. This feature allows system administrators efficiently maintain the network system.

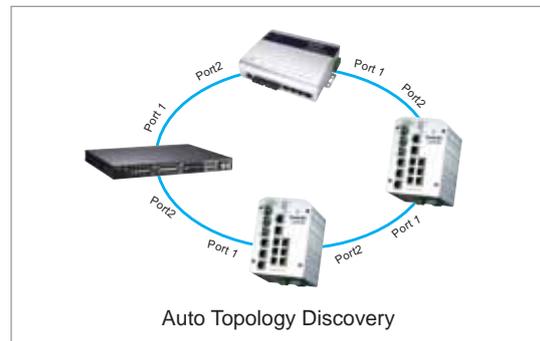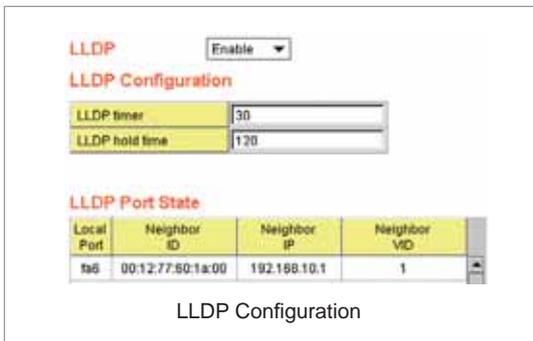

## Comprehensive Redundant Solutions — Multiple Super Ring (MSR™)

The JetNet 4006f supports Rapid Super Ring and Rapid Dual Homing which are included in M.S.R. ring technology for network ring redundancy applications. The two 100Base-FX Ethernet ports of JetNet 4006f provide high speed fiber uplink to connect with higher level backbone switches with Korenix MSR™ network

redundancy technology. To ensure continuous transmission, the RSR topology allows linking up the backup path in 5ms when main path disconnection occurs. Furthermore, to integrate with other core Switches JetNet 4006f provides Rapid Dual Homing function which allows to integrate RSR with RSTP.

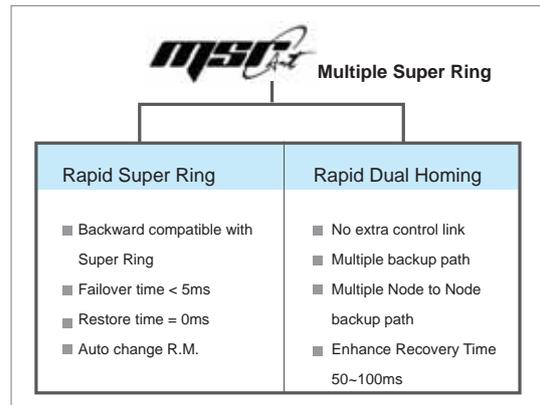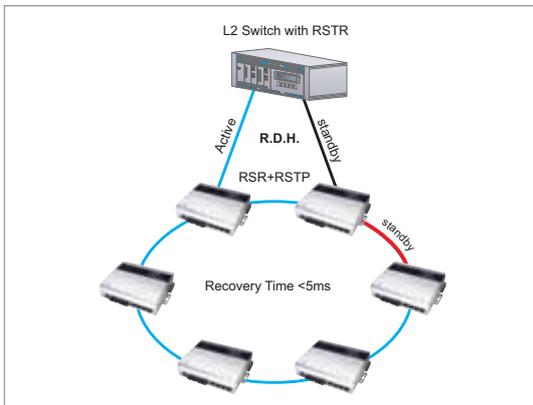

## Full Layer2 Network Management Interface

JetNet 4006f supports versatile management interfaces including secure Web browsing-HTTPS, secure remote Telnet management- S.S.H., SNMP v1/v2c/v3, RS-232 local console and Korenix NMS for


fast and easy installation. All the real-time system status can be simply monitored and configured through these management interfaces.



## Auto Device IP Obtain and Rerouting DHCP request

In large network systems, system IP address is difficult to maintain and efficiently assign to each device. Usually, it is listed in a table and it takes long time for IT engineers to configure those devices one by one unless using the DHCP technology. JetNet 4006f supports various DHCP functions, including DHCP Client, Server and Relay (option 82).

Using these features, it can obtain system IP address from DHCP Server, assign IP address to another link partner with IP& MAC address binding or exclude specified IP address, re-routing DHCP request to other network subnets. Therefore, system administrators can easily and efficiently manage the IP address without on-site configuration.

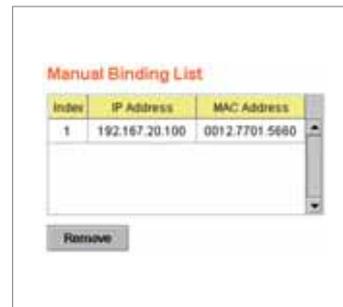

- Industrial Intelligent NMS
- Rackmount PoE Plus Switch
- Industrial PoE Plus Switch
- Industrial 12-24V PoE Switch
- Industrial PoE Switch
- Rackmount L3/L2 Switch
- Gigabit Managed Switch
- Managed Ethernet Switch
- Entry-level Switch
- Wireless Outdoor AP
- Embedded PoE/Router Computer (LINUX)
- Industrial Communication Computer (WIN/LINUX)
- Ethernet/PoE/ Serial Board
- Ethernet I/O Server
- Media Converter
- Serial Device Server
- SFP Module
- Din Rail Power Supply

## Quality of Service & Port-Based VLAN


To improve transmission performance, JetNet 4006f adopts QoS function with 8:4:2:1 WRR forwarding scheme and port-based VLAN with Tag ID modification function. These features ensure that the real-time service will be processed in low forwarding latency, like chatting via network, real-time security through video, etc.



## JetNet 4006f Appearance



## Dimension (Unit = mm)

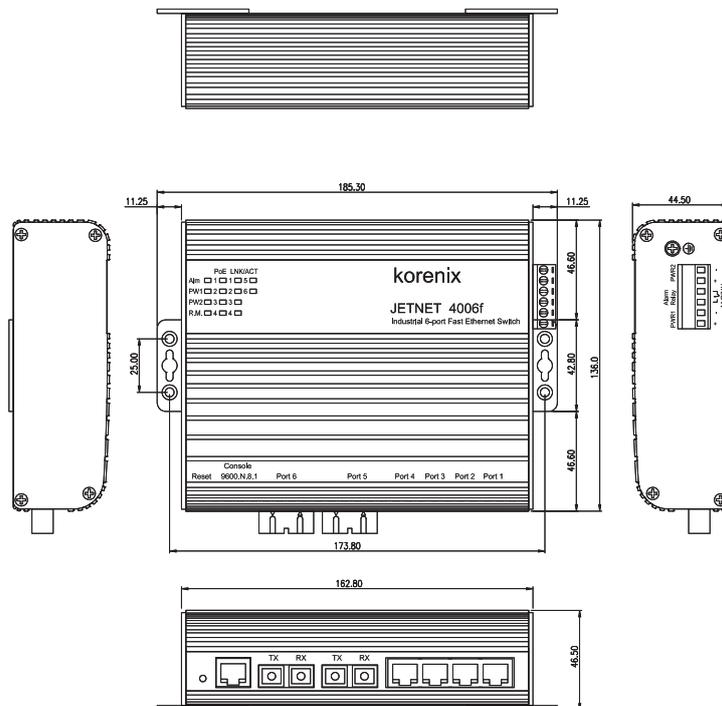

## Specification

### Technology

#### Standard:

IEEE 802.3 10Base-T  
 IEEE 802.3u 100Base-TX/100Base-FX  
 IEEE 802.1p Class of Service  
 IEEE 802.1D-2004 Rapid Spanning Tree Protocol (RSTP)  
 IEEE 802.1AB Link Layer Discovery Protocol

### Performance

**Switch Technology:** Store and Forward Technology with 3.2Gbps wire-speed non-blocking Switch Fabric

**System Throughput:** 1.785Mpps

**MAC Address:** 2000

**Packet Buffer:** Embedded 1Mbits shared buffer

**Transfer performance:** 14,880pps for Ethernet and 148,800 for Fast Ethernet and transfer packet size from 64 to 1522Bytes

**Management interface:** SNMP v1, v2c and v3, Web browser, Korenix View, Korenix NMS and Console Management

**SNMP MIB:** RFC 1213 MIBII, RFC 1493 Bridge MIB, RFC 1757 RMON MIB, RFC 2674 VLAN MIB, RFC 1643 Ethernet like MIB, RFC1215 Trap MIB, , Korenix Private MIB

**SNMP Trap:** The SNMP trap agent provides Cold start, Warm start, Port event, Power event, Authentication failure

**System Log:** 1000 system entries for system or remote log server

**Class of Service:** IEEE 802.1p class of service, with 4 priority queues per port

**Quality of Service:** Quality of Service determined by port, Tag and IPv4 Type of Service

**DHCP:** DHCP Client, DHCP Server and DHCP Relay (DHCP option 82) The DHCP-Server functions supports specified IP exclude and MAC binding function.

**Timer:** Supports Network Time Protocol (NTP) to synchronize time from internet

**VLAN:** Port Based VLAN with Tag modification

**IGMP:** The IGMP supports IGMP v1, V2C protocol with IGMP Snooping and Query functions

**Network Redundancy:** Supports Rapid Super Ring function for network redundancy with 35ms network recovery time; To inter-operate with other higher-level switches, it provides Rapid Dual Homing (R.D.H.) technology compliant with RSTP protocol. JetNet 4006 is also compliant with IEEE802.1d 2004 edition for RSTP and STP.

**IEEE 802.1AB LLDP:** Supports Link Layer Discovery Protocol for device discovery and building infrastructure map

**Event Alarm Relay:** 1 Dry Relay Contact output for port link down and System power events

Supports 1A @24V current ability

**Firmware upgrade:** TFTP and HTTP firmware upgrade

**Syslog:** Message logged with server and client mode

### Interface

#### Number of Ports:

4 x 10/100 Base-TX  
 2 x 100Base-FX

**Connectors:** 10/100TX: RJ-45

100Mbps Fiber : SC

RS-232 Console: RJ-45

6-pin Terminal Block: Power 1 and 2, Dry Relay Alarm Output

#### Fiber Transceiver:

JetNet 4006f-m, Multi-mode: 2KM max. distance

Wave-length: 1310 nm

Min Tx Power:-19 dBm

Max Tx Power:-14 dBm

Min Rx Sensitivity:-30 dBm

Link budget:11 dBm

JetNet 4006f-s, Single-mode: 30KM max. distance

Wave-length:1310 nm

Max Tx Power:-8 dBm

Min Tx Power:-15 dBm

Min Rx Sensitivity:-34 dBm

Link budget:19 dBm

**Cable:** 10Base-T: 4-pair UTP/STP Cat. 3, 4, 5 cable,

EIA/TIA-568B 100-ohm(100m)

100Base-TX: 4-pair UTP/STP Cat.5, Cat.5E/Cat.6 cable,

EIA /TIA-568B 100-ohm(100m)

100Base-FX: Multi-mode 50~62.5/125um; Single-mode 8~10/125um

**Reset Button:** For system reboot and factory default setting

**Diagnostic LED:** Power LED: Power 1/Power 2 (Green)

Fast Ethernet Port 1~6: Link (Green) /Activity (Green blinking). Alarm (Red): Port link down or power failure occurred – software configuration

### Power Requirements

#### System Power:

Redundant Power input with polarity reverse function

Power Input: DC 12~48V

**Power Consumption:** 8 Watts @ 48V (Maximum)

### Mechanical

**Installation:** DIN-Rail or wall mount

**Case:** IP-31 grade aluminum metal case

#### Dimension:

45.5 mm (H) x 185.3 mm (W) x 136 mm (D) without DIN

**Weight:** 0.62 kg with package

0.55 kg without package

### Environmental

**Operating Temperature:** -10 ~ 60°C (JetNet 4006f),

-40 ~ 60°C (JetNet 4006f-w)

**Operating Humidity:** 5% ~ 95% (non-condensing)

**Storage Temperature:** -40 ~ 80°C

**Storage Humidity:** 5% ~ 90% (non-condensing)

### Regulatory Approvals

**EMI:** CE/EN55022. Class A, FCC Class A

**EMS:** IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4,

IEC 61000-4-5, IEC 61000-4-6

**Shock:** IEC60068-2-27

**Vibration:** IEC60068-2-6

**Free Fall:** IEC60068-2-32

**Warranty:** 5 years

Industrial  
Intelligent  
NMS

Rackmount  
PoE Plus  
Switch

Industrial  
PoE Plus  
Switch

Industrial  
12-24V  
PoE Switch

Industrial  
PoE Switch

Rackmount  
L3/L2 Switch

Gigabit  
Managed  
Switch

Managed  
Ethernet  
Switch

Entry-level  
Switch

Wireless  
Outdoor AP

Embedded  
PoE/Router  
Computer  
(LINUX)

Industrial  
Communication  
Computer  
(WIN/LINUX)

Ethernet/PoE/  
Serial Board

Ethernet  
I/O Server

Media  
Converter

Serial Device  
Server

SFP Module

Din Rail  
Power Supply



## Ordering Information

---

**JetNet 4006f-m Industrial 6-port Managed Fast Ethernet Ring Switch, 1 SC/Multi-mode, 2KM, -10~60°C operating temperature**

**JetNet 4006f-mw Industrial 6-port Managed Fast Ethernet Ring Switch, 1 SC/Multi-mode, 2KM, -40~60°C operating temperature**

Includes:

- JetNet 4006f-m / 4006f-mw
- Quick Installation Guide
- RS-232 Serial Cable
- DIN Rail Mount Kit

**JetNet 4006f-s Industrial 6-port Managed Fast Ethernet Ring Switch, 1 SC/Single-mode, 30KM, -10~60°C operating temperature**

**JetNet 4006f-sw Industrial 6-port Managed Fast Ethernet Ring Switch, 1 SC/Single-mode, 30KM, -40~60°C operating temperature**

Includes:

- JetNet 4006f-s / 4006f-sw
- Quick Installation Guide
- RS-232 Serial Cable
- DIN Rail Mount Kit